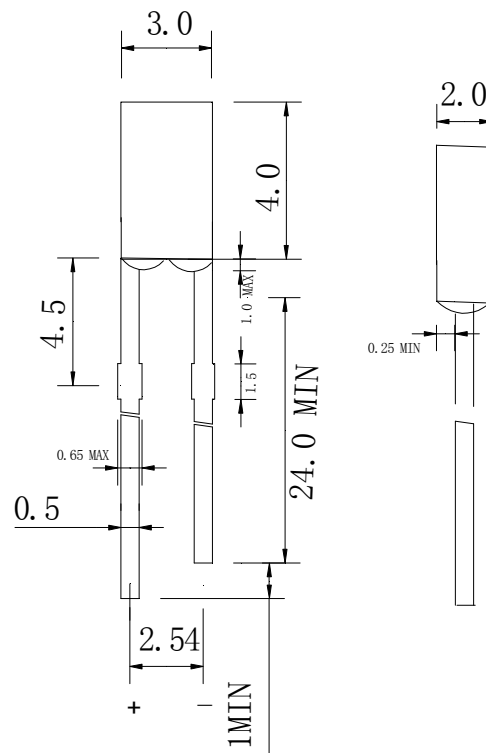


Features

- 2*3*4. DIA LED Lamp
- Low Power Consumption
- High Efficiency
- Various Colors and Viewing Angle
- Long Solid State Reliability
- Package: 1000pcs/Packing

Applications

- Indicator

Package Dimensions**Notes:**

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.01") unless otherwise noted.
3. Protruded Resin under flange is 1.0mm(0.04") max.
4. Specifications are subject to change without notice.



Selection Guide

| Part No | Lens Type | Dice | Emitted Color |
|-------------------|-----------------|-------|---------------|
| FDL-234YD-ZYDLTHQ | Yellow Diffused | GaAsP | Super Yellow |

Electrical / Optical Characteristics At Ta=25°C

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Test Condition |
|--------|--------------------------|------|------|------|------|----------------|
| Iv | Luminous Intensity | 5.0 | 9.0 | 13 | mcd | IF=20mA |
| 2θ1/2 | Viewing Angle | | 175 | | deg | IF=20mA |
| λ d | Dominant Wavelength | 583 | 585 | 589 | nm | IF=20mA |
| Δλ | Spectral Line Half-Width | | 30 | | nm | IF=20mA |
| VF | Forward Voltage | 2.1 | 2.3 | 2.6 | V | IF=20mA |
| IR | Reverse Current | | | 10 | uA | VR 5V |

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 optical centerline value

Absolute Maximum Ratings At Ta=25°C

| Parameter | Yellow | Unit |
|-----------------------------|---------------------|------|
| Power Dissipation | 70 | mW |
| Peak Forward Current[1] | 120 | mA |
| Continuous Forward Current | 30 | mA |
| Reverse Voltage | 5 | V |
| Operating Temperature Range | -40°C to + 85°C | |
| Storage Temperature Range | -40°C to + 85°C | |
| Soldering Condition | 260°C For 5 Seconds | |

Note:

1. 1/10DutyCycle, 0.1msPulseWidth

Electrical Optical Characteristics Curves At Ta=25°C

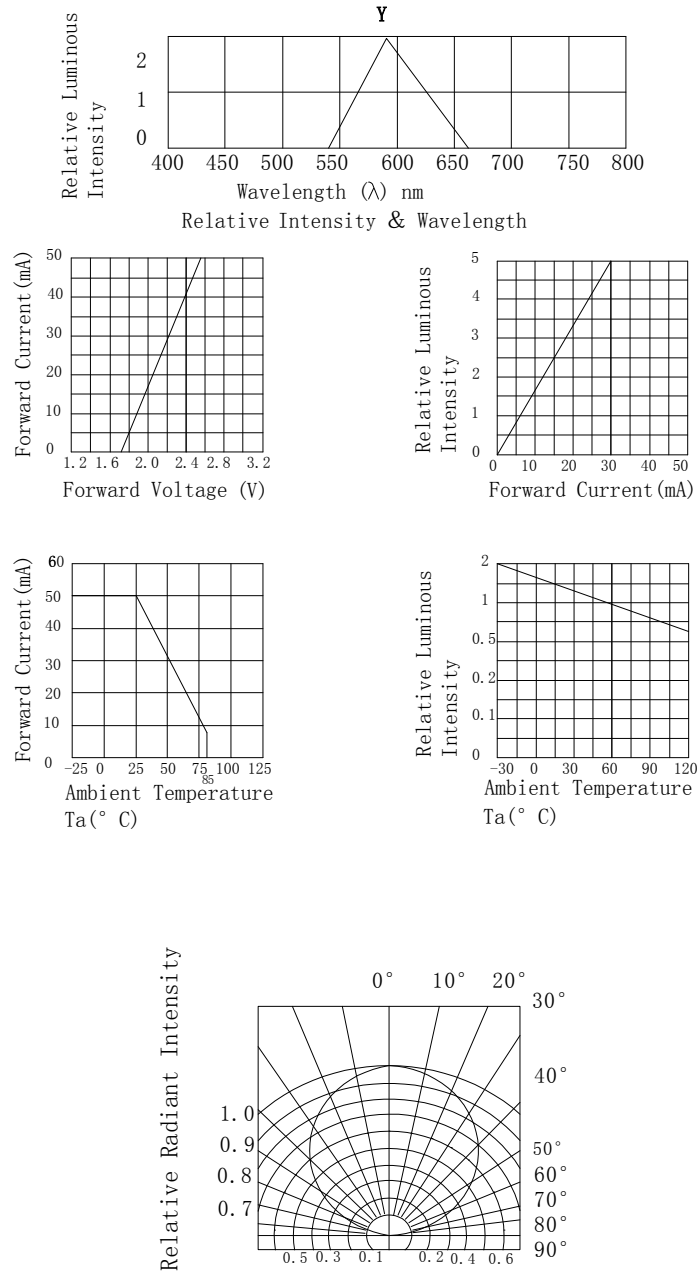


Fig.6 Radiation Diagram

Notes:

1. The LEDs should be used within a year.
2. The LEDs should be kept in 5~30°C and 60% RH for less.
3. The LEDs should be used within 24 hours, or else should be kept a 5~30°C and 30% RH or less. And LEDs should be used within 7 days after opening the package.

Reliability Test Items Conditions

| Classification | Test Item | Test Conditions | Test hours | Result |
|--------------------|-----------------------------------|---|------------|--------|
| Endurance Test | Opertion Life | Connect with a power $I_F=20mA$ T_a =Under room temperature | 1000Hrs | 0/20 |
| | Hige Temperature High Humidity | $T_a=+65^{\circ}C\pm5^{\circ}C$ RH=90%-95% | 240Hrs | 0/20 |
| | Hige Temperature Storage | High $T_a=+85^{\circ}C\pm5^{\circ}C$ | 1000Hrs | 0/20 |
| | Low Temperature Storage | Low $T_a=-35^{\circ}C\pm5^{\circ}C$ Test time=1000hrs | 1000Hrs | 0/20 |
| Environmental Test | Temperature Cycling | $-45^{\circ}C\sim+105^{\circ}C$ 15min 5min 15min | 300 Cycles | 0/20 |
| | Thermal Shock | $-35^{\circ}C\sim\pm5^{\circ}C\sim+85^{\circ}C\sim\pm5^{\circ}C$ 5min 10sec 5min | 300 Cycles | 0/20 |
| | Solder Resistance | Preheating: $120^{\circ}C-150^{\circ}C$,within 2 minutes. Operation heating : $260^{\circ}C$ (Max.),within5 seconds(Max.) | 5Cycles | 0/20 |

Judgment criteria of failure for the reliability

| Measuring items | Symbol | Measuring conditions | Judgment criteria for failure |
|--------------------|--------------|----------------------|-------------------------------|
| Forward voltage | $V_F(V)$ | $I_F=20mA$ | Over $U\times 1.2$ |
| Reverse current | $I_R(\mu A)$ | $V_R=5V$ | Over $U\times 2$ |
| Luminous intensity | $I_v(mcd)$ | $I_F=20mA$ | Below $S\times 0.5$ |

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurment shall be taken between 2 hours after the test pieces have been returned to normal ambient conditions after completion of each test.