


**Features**

- 1.6mm\*1.5mm SMT LED, Super thin (0.55H mm)
- Low Power Consumption
- Wide Viewing Angle
- Various Colors
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow and wave solder process.
- Meet ROHS Green Product.
- Package: 3000pcs/Reel

**Applications**

- Backlight and Indicator

**Package Dimensions**

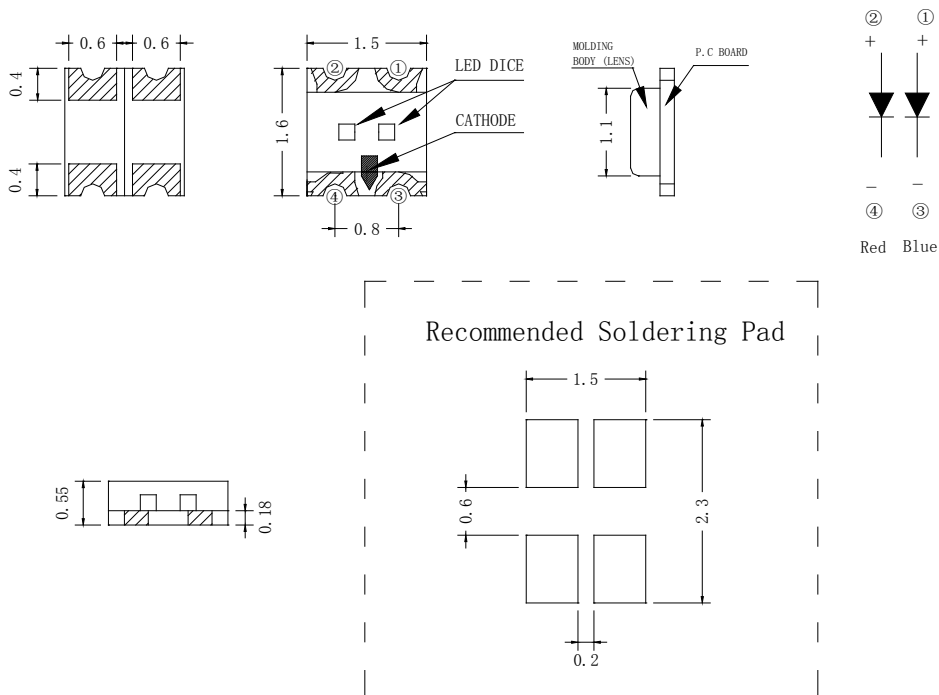

**Notes:**

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.2$  mm (.0079") unless otherwise noted.
3. Specifications are subject to change without notice
4. This drawing is only for reference, not as a basis for the actual structure.



**Selection Guide**

Part No	Lens Type	Dice	Emitted Color
FSL-1615055BR-FAT5NC3	Water Clear	InGaN AlGaInP	Blue Red

**Electrical / Optical Characteristics At Ta=25 °C**

Symbol	Parameter		Blue	Red	Unit	Test Condition
Iv	Luminous Intensity	MIN.	18	18	mcd	IF=5mA
		TYP.	45	45		
		MAX.				
2θ1/2	Viewing Angle	TYP.	130	130	deg	IF=5mA
λ Peak	Peak Emission Wavelength	TYP.	468	632	nm	IF=5mA
λ d	Dominant Wavelength	MIN.	460	617.5	nm	IF=5mA
		TYP.	470	631.0		
		MAX.	475	637.5		
Δλ	Spectral Line Half-Width	TYP.	25	20	nm	IF=5mA
VF	Forward Voltage	MIN.	2.5	1.5	V	IF=5mA
		TYP.	3.0	2.0		
		MAX.	3.8	2.5		
IR	Reverse Current	MAX.	10	10	μ A	VR=5V

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 optical centerline value


**Absolute Maximum Ratings At Ta=25°C**

Parameter	Blue	Red	Unit
Power Dissipation	120	75	mW
Peak Forward Current[1]	100	80	mA
Continuous Forward Current	30	30	mA
Dreading Linear From 30°C	0.25	0.4	mA/°C
Reverse Voltage	5	5	V
Electrostatic Discharge Threshold(HBM)	150	2000	V
Operating Temperature Range	-45°C to + 85°C		
Storage Temperature Range	-55°C to + 105°C		
Soldering Condition	260°C For 10 Seconds		


Note:

1. 1/10DutyCycle, 0.1msPulseWidth


**Electrical Optical Characteristics Curves At Ta=25 °C**

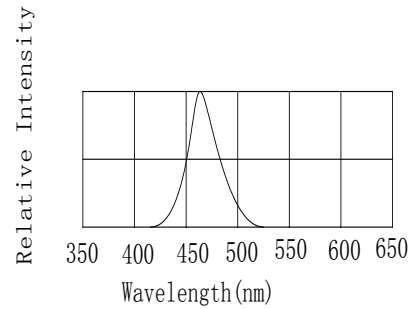


Relative Intensity vs. Wavelength (nm)

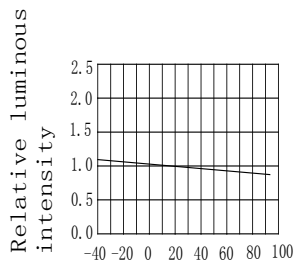


Relative Luminous Intensity vs. Ambient temperature

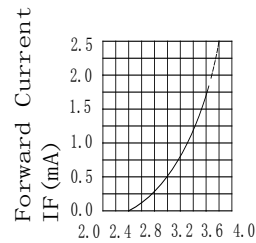


Forward Current vs. Forward Voltage

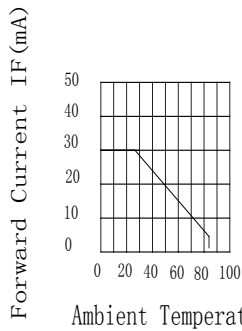

Forward Current Derating Curve


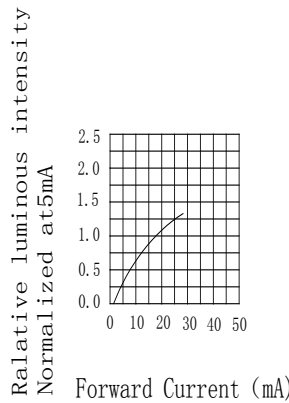


Forward Intensity vs. Forward Current

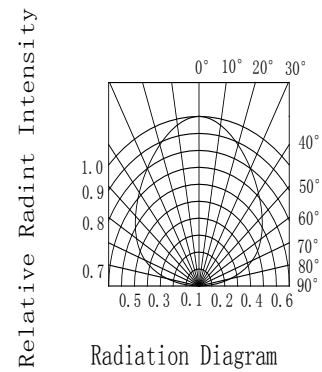


Radiation Diagram


Electrical Optical Characteristics Curves At Ta=25 °C

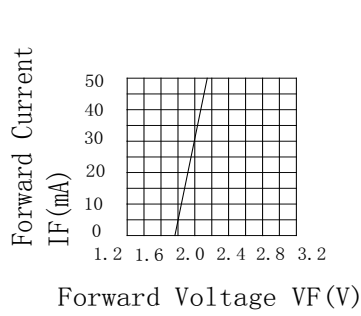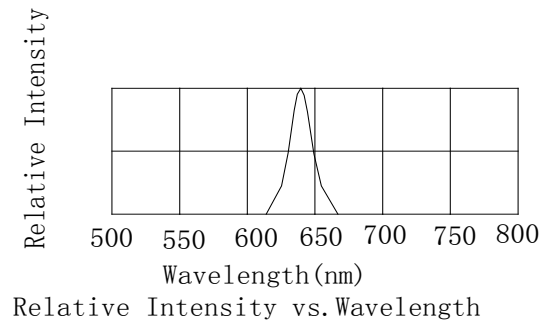


Forward Current vs. Forward Voltage

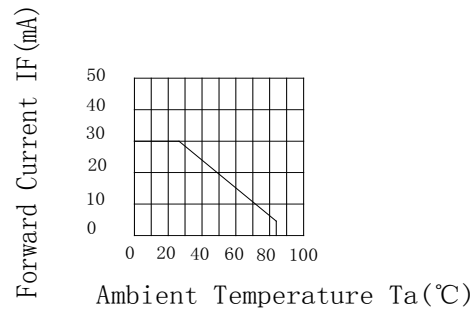

Forward Current Derating Curve

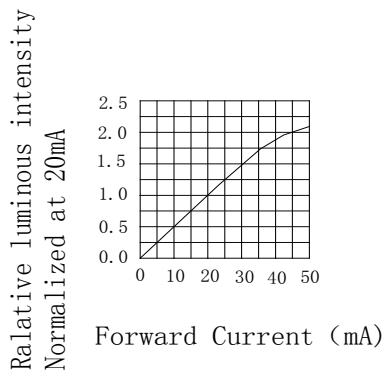

Forward luminous Intensity vs. Forward Current

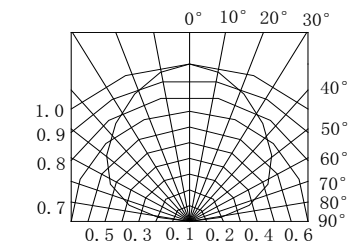

Spatial Distribution



**Bin Range Of Luminous Intensity**

Symbol	Bin Code	Min.	Max.	Unit	Condition
Iv(B)	M	18	28	mcd	IF=5mA
	N	28	45		
	P	45	72		
	Q	72	112		
Iv(R)	M	18	28	mcd	IF=5mA
	N	28	45		
	P	45	72		
	Q	72	112		

**Bin Range Of Forward Voltage**

Symbol	Bin Code	Min.	Max.	Unit	Condition
VF(B)	V25	2.50	2.70	V	IF=5mA
	V27	2.70	2.90		
	V29	2.90	3.10		
	V31	3.10	3.30		
	V33	3.30	3.50		
	V35	3.50	3.80		
VF(R)	V15	1.5	1.7	V	IF=5mA
	V17	1.7	1.9		
	V19	1.9	2.1		
	V21	2.1	2.3		
	V23	2.3	2.5		


**Bin Range Of Dominate Wavelength**

Symbol	Bin Code	Min.	Max.	Unit	Condition
$\lambda$ d(B)	B1	460	465	nm	IF=5mA
	B2	465	470		
	B3	470	475		
$\lambda$ d(R)	R1	617.5	621.5	nm	IF=5mA
	R2	621.5	625.5		
	R3	625.5	629.5		
	R4	629.5	633.5		
	R5	633.5	637.5		

Notes:

1. Tolerance of Luminous Intensity +/-20%
2. Tolerance of Forward Voltage +/-0.15V
3. Tolerance of the Dominate Wavelength +/- 2nm

### SMT Reflow Soldering Instructions

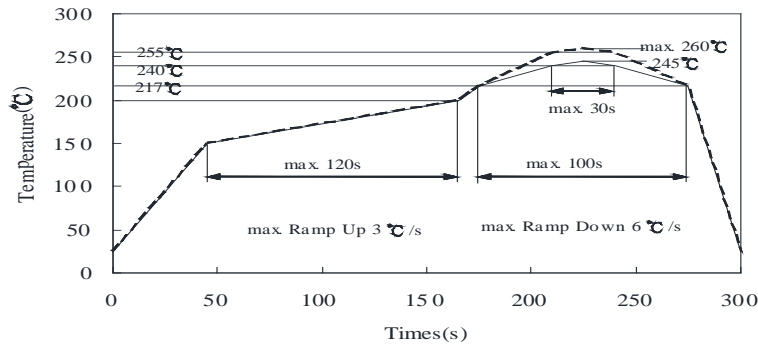


**Notes:**


1. Selles gives no other assurances regarding the ability of to withstand ESD. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.
2. Reflow soldering should not be done more than two times.
3. Do not stress LED when soldering, and do not warp the circuit board after soldering
4. While using Iron, Power dissipation of Iron should be smaller than 25W, and temperature should be controllable. The work should be finished within 2 sec under 320°C for once only.

### Application

In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended to use individual resistor separately, as shown in Circuit A below. The brightness of each LED shown in Circuit B might appear difference due to the differences in the I-V characteristics of those LEDs.

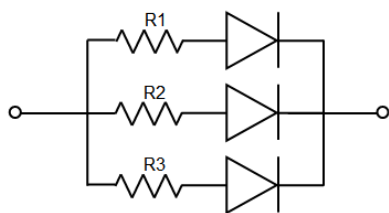


**Circuit model A**

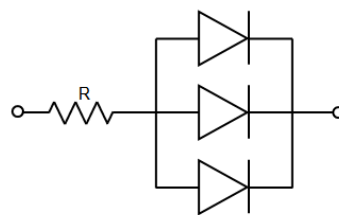


**Circuit model B**

**Reel Dimensions**

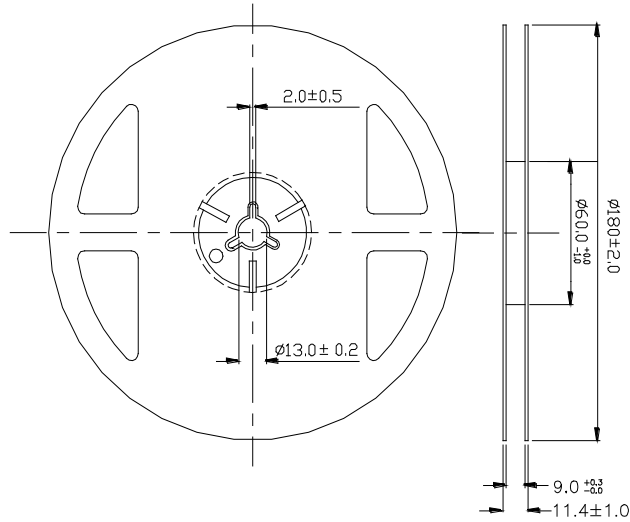

**Package Specifications (Units: mm(inches))**

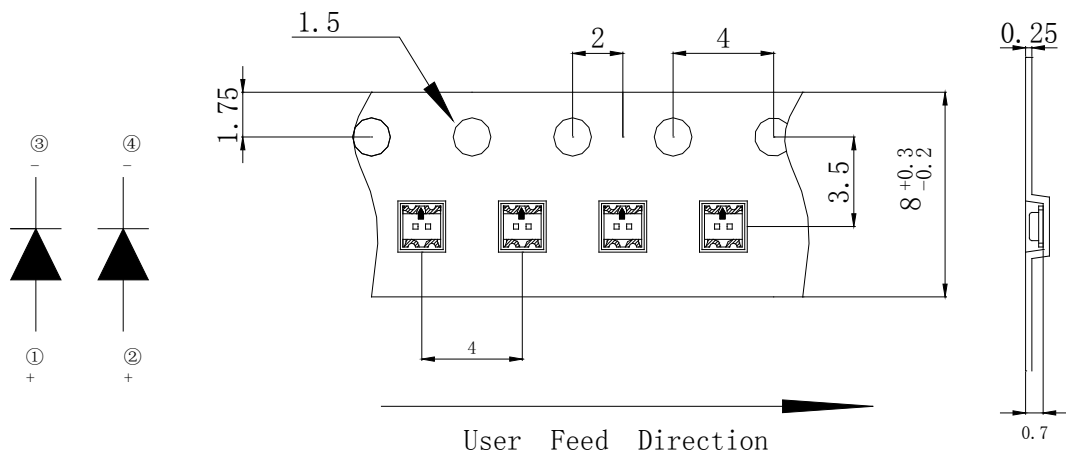

**Notes:**

1. The LEDs should be used within a year.
2. The LEDs should be kept in 5~30°C and 60% RH for less.
3. The LEDs should be used within 24 hours, or else should be kept a 5~30°C and 30% RH or less. And LEDs should be used within 7 days after opening the package.

**Reliability Test Items Conditions**

Classification	Test Item	Test Conditions	Test hours	Result
Endurance Test	Operation Life	Connect with a power $I_F=5mA$ $T_a$ =Under room temperature	1000Hrs	0/20
	High Temperature High Humidity	$T_a=+65^{\circ}C\pm5^{\circ}C$ RH=90%-95%	240Hrs	0/20
	High Temperature Storage	High $T_a=+100^{\circ}C\pm5^{\circ}C$	1000Hrs	0/20
	Low Temperature Storage	Low $T_a=-50^{\circ}C\pm5^{\circ}C$ Test time=1000hrs	1000Hrs	0/20
Environmental Test	Temperature Cycling	$-50^{\circ}C\sim+105^{\circ}C$ 15min 5min 15min	300 Cycles	0/20
	Thermal Shock	$-45^{\circ}C\sim\pm5^{\circ}C\sim+85^{\circ}C\sim\pm5^{\circ}C$ 5min 10sec 5min	300 Cycles	0/20
	Solder Resistance	Preheating: $120^{\circ}C-150^{\circ}C$ , within 2 minutes. Operation heating : $260^{\circ}C$ (Max.), within 10 seconds(Max.)	5Cycles	0/20

**Judgment criteria of failure for the reliability**


Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	$V_F(V)$	$I_F=5mA$	Over $U\times 1.2$
Reverse current	$I_R(\mu A)$	$V_R=5V$	Over $U\times 2$
Luminous intensity	$I_v(mcd)$	$I_F=5mA$	Below $S\times 0.5$

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurement shall be taken between 2 hours after the test pieces have been returned to normal ambient conditions after completion of each test.




**Moisture Resistant Packaging**

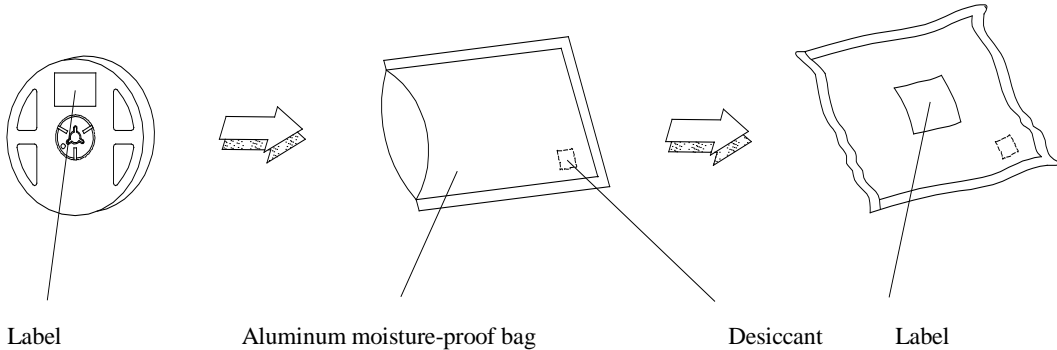

Remark: Add Desiccant into Aluminum moisture-proof bag

**Label Explanation**

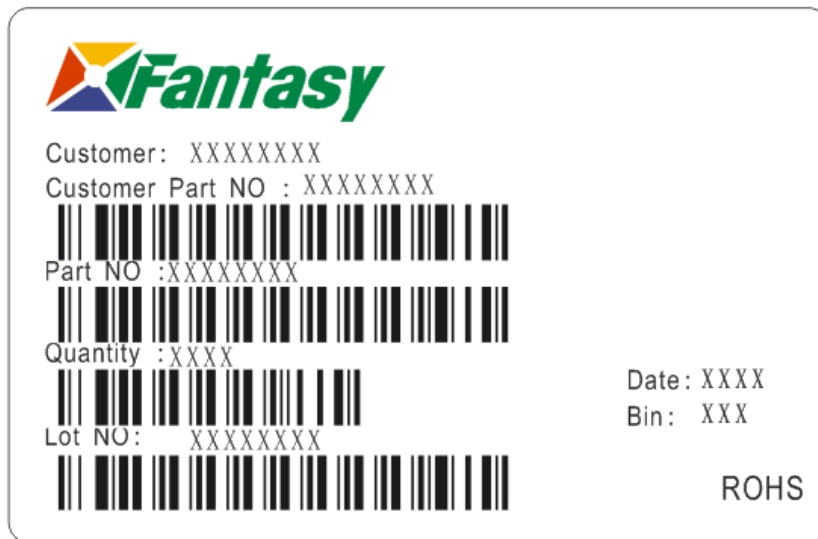

- Customer: Customer Name
- Customer Part NO: Customer's Product Number
- Part NO : Fantasy Product Number
- Quantity : Packing Quantity
- Lot NO : Lot Number
- Date : Product Date (Week)
- Bin: Rank of Luminous Intensity ,Dom. Wavelength, Forward Voltage